









# Huijue 48-core optical cable technical parameters

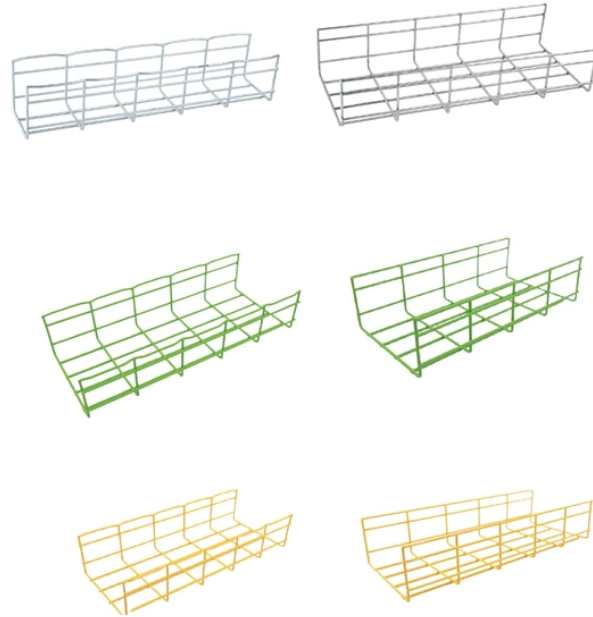



## Huijue 48-core optical cable technical parameters


	<p>Optical Fiber Core could be applied as G.652.D, G.655, G.657.A1, G.657.A2, OM1, OM2, OM3, OM4 according to needs. Maximum Tensile Strength could be changed according to technical demand. ...</p>
	<p>The optical fiber shall be made of high pure silica and germanium doped silica. UV curable acrylate material is applied over fiber cladding as optical fiber primary protective coating.</p>
	<p>can be used both indoors and outdoors. The single mode optical fibre meets and excee. IEC*, ITU and EIA/TIA specifications. This optica. cable contains 48 fibers in PBT tubes. The tubes and fibers a. e ...</p>
	<p>2. Applicable Standards: rds named below and the technical specifications described in the following sections. All standards, specifications and codes of practice referred to herein shall be the latest ...</p>
	<p>PRODUCT DESCRIPTION Fiber Optic Cable - OM4 Multimode Fiber, Plenum or Riser Rated cable that is o ered in 48, 60, 72, or 96 ber con uration. ... DESCRIPTION OM4 48 Fiber Cable OFNP, XXX ...</p>

 <p>SC connector X 12</p>	<p>IEC60794-1-1 IEC60794-1-2 Optical fiber Part 1: Generic specifications Optical fiber Part 2: Product specifications</p>
--	--

	<p>This kind of cable is specifically used for self supporting aerial installation. The mental strength member is made up of stranded wires as the supporting part are completed with a polyethylene (PE) sheath ...</p>
---	--

	<p>The 24 core cable has 18 aluminum alloy wires for strength members, while the 48 core cable has 17 strength members. Key specifications include fiber counts, coating materials, attenuation coefficients, ...</p>
--	---

	<p>The cable operates efficiently across a wide temperature range, from -40°C to +70°C (-40°F to +158°F), and is designed to withstand tensile strengths of up to 1000 N. Additionally, it features a minimum ...</p>
---	---

	<p>Opti-Core™ Fibre Optic Indoor-Outdoor Armoured Cable 48 to 144-Fibres, EuroClass Cca and B2ca for EMEA A T A S H E E T</p>
---	---

## Contact Us

For more information, pricing, or custom solutions, please contact us:

Website: <https://www.samastersbaseball.co.za>

Email: [sales@samastersbaseball.co.za](mailto:sales@samastersbaseball.co.za)

Phone: +27 63 874 2095

Address: 15 Innovation Drive, Technopark, Stellenbosch, 7600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

